


FOA/FTA 电动执行器

F-V 球阀电动执行器的选型DN10-150

| FOA/FTA | | 开关型 | 调节型 |
|---------|-----|------------------|------------------|
| 最大工作压力 | DN | FOA | FTA |
| 63bar | 10 | FOA003F03F05/11A | FTA003F03F05/11A |
| | 15 | FOA003F03F05/11A | FTA003F03F05/11A |
| | 20 | FOA003F03F05/11A | FTA003F03F05/11A |
| | 25 | FOA003F03F05/11A | FTA003F03F05/11A |
| | 32 | FOA005F05F07/14A | FTA005F05F07/14A |
| | 40 | FOA005F05F07/14A | FTA005F05F07/14A |
| | 50 | FOA008F05F07/17A | FTA008F05F07/17A |
| | 65 | FOA008F05F07/17A | FTA008F05F07/17A |
| | 80 | FOA010F05F07/17A | FTA010F05F07/17A |
| | 100 | FOA015F05F07/17A | FTA015F05F07/17A |
| | 125 | FOA030F07F10/22A | FTA030F07F10/22A |
| | 150 | FOA060F07F10/27A | FTA060F07F10/27A |

技术参数及尺寸

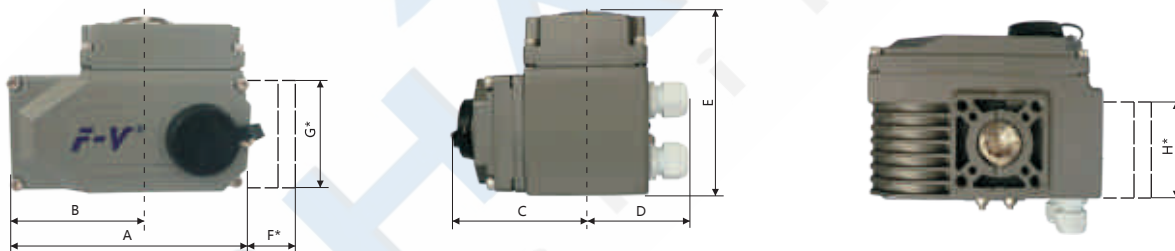

| FOA/FTA | 最大输出 扭矩 | 90°动作 时间 | 输出轴 | 电机 | 单相额定 电流 | 重量 | A | B | C | D | E | F* | G* | H* |
|---------|------------|-------------|-------------|-----|------------|------|-----|-----|-----|-----|-----|----|-----|-----|
| | N.M | S | mm | W | 220W(A) | KG | mm | mm | mm | mm | mm | mm | mm | mm |
| 003 | 30 | 10 | 9*9 11*11 | 8 | 0.15 | 2.1 | 123 | 74 | - | - | 113 | - | - | - |
| 005 | 50 | 30 | 11*11 14*14 | 10 | 0.25 | 3.6 | 160 | 89 | - | - | 121 | 40 | 114 | 105 |
| 008 | 80 | 30 | 11*11 14*14 | 10 | 0.25 | 3.6 | 160 | 89 | - | - | 121 | 40 | 114 | 105 |
| 010 | 100 | 30 | 14*14 17*17 | 15 | 0.35 | 4.6 | 189 | 107 | - | - | 129 | 40 | 114 | 105 |
| 015 | 150 | 30 | 14*14 17*17 | 15 | 0.37 | 4.6 | 189 | 107 | - | - | 129 | 40 | 114 | 105 |
| 020 | 200 | 30 | 22*22 | 45 | 0.3 | 13 | 266 | 152 | 119 | 106 | 164 | 40 | 114 | 105 |
| 030 | 300 | 30 | 22*22 | 45 | 0.31 | 13.4 | 266 | 152 | 119 | 106 | 164 | 40 | 114 | 105 |
| 040 | 400 | 30 | 22*22 | 60 | 0.33 | 13.8 | 266 | 152 | 119 | 106 | 164 | 40 | 114 | 105 |
| 060 | 600 | 30 | 27*27 | 90 | 0.33 | 14 | 266 | 152 | 119 | 106 | 164 | 40 | 114 | 105 |
| 080 | 800 | 40 | 27*27 | 180 | 0.47 | 14.3 | 266 | 152 | 119 | 106 | 164 | 40 | 114 | 105 |
| 100 | 1000 | 40 | 27*27 | 180 | 0.47 | 60 | 266 | 152 | 119 | 106 | 164 | 40 | 114 | 105 |
| 160 | 1600 | 120 | Max 65 | 180 | 0.85 | 60 | 268 | 152 | 119 | 106 | 164 | 40 | 144 | 105 |
| 200 | 2000 | 120 | Max65 | 180 | 0.85 | 60 | 268 | 152 | 119 | 106 | 164 | 40 | 114 | 105 |
| 300 | 3000 | 120 | Max65 | 180 | 0.85 | 60 | 268 | 152 | 119 | 106 | 164 | 40 | 114 | 105 |

* 调节盒的尺寸