

ROTARY LOBE



MultiPump



wright flow
TECHNOLOGIES®

Capacity to 189 m³/hr / 832 USGPM

Pressure to 12 BAR / 174 PSI

Viscosity to 200,000 cSt / 910,000 SSU

Temperature to 180°C / 355°F

SHARRY Machinery (Shanghai) Co.,Ltd. Tel: +86-21-64881886
13761943624 Mail:wangfeng858@163.com Web: www.sharry-sh.com



扫一扫，进入手机旺铺

YOUR COMPLETE

Hygienic Solutions Provider

- GLOBAL PRESENCE WITH LOCALIZED SERVICE
- BROADEST PD PUMP OFFERING IN THE INDUSTRY
- COMPLETE PARTNER FOR YOUR HYGIENIC PROCESS

wright flow
TECHNOLOGIES®

Around the world, Wright Flow Technologies provides solutions for challenges in fluid handling. You can count on the reliability of Wright Flow hygienic positive displacement (PD) pumps. Matching the right pump with your fluid processing needs is easy with innovative, robust designs, cleanability & an extensive product offering.

Remanufacturing

Training

Accessories

Service

Parts

Pumps

MultiPump

As a proven classic, this pump design has endured the test of time. You will find these traditional rotary lobe pumps working reliably around the globe. A simple & economical solution for hygienic processing needs.



How it Works



Suction



Discharge

Wright Flow Technologies' rotor lobes rotate around the circumference of the channel in the pump casing. This continuously generates a partial vacuum at the suction port as the rotors unmesh, causing fluid to enter the pump.

The fluid is transported around the channel by the rotor lobes, & is displaced as the rotor lobes re-mesh, generating pressure at the discharge port. Pump output is directly proportional to speed, and direction of flow is reversible.

SHARRY Machinery (Shanghai) Co., Ltd. Tel: +86-21-64881886
13761943624 Mail: wangfeng858@163.com Web: www.sharry-sh.com



扫一扫，进入手机旺铺

MultiPump

CLEANABILITY

- Modular pump design promotes easy disassembly for COP (Clean Out of Place) & CIP (Clean In Place)
- Casing profile cusps maximize efficiency & draining capability

PERFORMANCE

- Timed, non-contacting rotors minimize shear while providing extended run-dry capability
- Helical timing gears provide high torque & quieter operation for extended pump life
- Tapered roller bearings provide higher operating speeds & better discharge pressures

EASE OF MAINTENANCE

- Removable foot for easier placement
- Classic RLP design



Preventive Maintenance Kits


ENSURE TROUBLE-FREE OPERATION & SUPERIOR PERFORMANCE

BENEFITS OF MAINTENANCE KITS:

- Everything you need in one place
- Reduce frequency of repairs
- Increase service life
- Increase uptime
- Save time & money
- Kits include exploded diagram & parts list



BACK OF MAINTENANCE KIT:

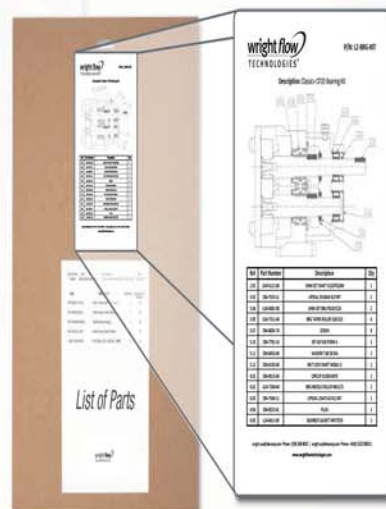

REBUILD VS. REPLACE:

- Wright Flow kits are designed to save time & money, making preventive maintenance easier & more cost-effective
- Wright Flow pumps are designed & built to the highest standards, for long life & to be rebuilt instead of replaced when applicable
- Tool kits also available



COMPLIANT WITH THE FOLLOWING STANDARDS



SHARRY Machinery (Shanghai) Co.,Ltd. Tel: +86-21-64881886
13761943624 Mail:wangfeng858@163.com Web: www.sharry-sh.com



扫一扫，进入手机旺铺

PORTING OPTIONS:

- Complete range of hygienic clamp, screw, flange & industrial screw connections
- Tri-clamp, flanged, DIN, IMDA, NPT, BSP, etc.

SEAL OPTIONS:

- Single O-ring
- Single mechanical
- Single mechanical with flush or quench
- Double mechanical with flush
- Gland packing
- Gland packing with lantern ring with flush
- Complete range of material options

GEAR BOX OPTIONS:

- Powder-coated or painted standard (size dependent)

ROTOR & CASING OPTIONS:

- 316L stainless steel pump casing with interior finished to 3-A standards
- 316L stainless steel rotors
- Improved surface finishes & electropolishing optional
- Front cover jacket or rotor case saddles




PERFORMANCE RANGE:

CAPACITY	to 189 m³/hr / 832 USGPM
PRESSURE	to 12 BAR / 174 PSI
VISCOSITY	to 200,000 cSt / 910,000 SSU
TEMPERATURE	to 180°C / 355°F

COMPLIANT WITH THE FOLLOWING STANDARDS



MultiPump Model	Displacement		Max Pressure		Max Speed	Standard Ports		Max Capacity		Max Temperature	
	l/rev.	USG/rev.	BAR	PSI	RPM	mm	in.	m³/hr	USGPM	Deg. C	Deg. F
10/0005/12	0.046	0.0122	12	174	1400	25	1"	3.9	17.1	150	300
10/0008/08	0.083	0.0219	8	115	1400	38	1 1/2"	7	30.7	150	300
10/0011/05	0.111	0.0293	5	70	1400	38	1 1/2"	9.3	41	150	300
20/0020/12	0.202	0.0534	12	174	1000	38	1 1/2"	12.1	53.4	150	300
20/0031/07	0.313	0.0827	7	100	1000	50	2"	18.8	82.7	150	300
30/0069/12	0.694	0.1834	12	174	750	50	2"	31.2	137.6	150	300
30/0113/07	1.125	0.2972	7	100	750	76	3"	50.6	222.9	150	300
40/0180/12	1.8	0.4756	12	174	700	76	3"	75.6	332.9	150	300
40/0250/07	2.5	0.6605	7	100	700	101	4"	105	462.4	150	300
50/0351/12	3.514	0.9284	12	174	650	101	4"	137	603.5	180	355
50/0525/08	5.25	1.387	8	115	600	150	6"	189	832.2	180	355

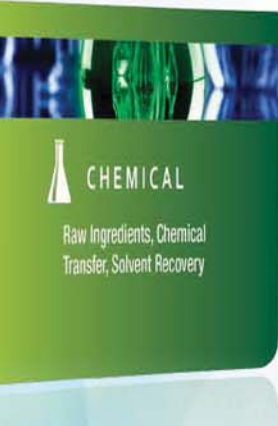



Rotary Lobe Pumps

